



Modicon Transformer

Single phase transformers
230 to 400 Vac, 25 to 2500 VA
Modicon ABT7, ABL6



Modicon

Discover Modicon

Industrial Edge control for IIoT

Modicon IIoT-native edge controllers manage complex interfaces across assets and devices or directly into the cloud, with embedded safety and cybersecurity. Modicon provides performance and scalability for a wide range of industrial applications up to high-performance multi-axis machines and high-available redundant processes.

Explore our offer

- Modicon HVAC Controllers
- Modicon PLC
- Modicon Motion Controllers
- Modicon PAC
- Modicon I/O
- Modicon Networking
- Modicon Power Supply
- Modicon Wiring
- Modicon Safety

Life Is On



Quick access to product information

Get technical information about your product

References

Modicon TM3
I/O expansion modules for Modicon controllers
Analog I/O modules


Number and type of channels	Input range	Resolution	Input format (internal (mA))	Reference	Weight (kg)
2 voltage inputs	-15...+15 VDC 0...20 mA r.t. 20 mA	16,000 or 10,000 r.t.	0VDC 0VDC	TM3AI2H TM3AI2HG	0.110 0.100
4 voltage inputs	-15...+15 VDC 0...20 mA r.t. 20 mA	12,000 or 10,000 r.t.	0VDC 0VDC	TM3AI4 TM3AI4G	0.100 0.100
4 voltage or temperature inputs (T)	-15...+15 VDC 0...20 mA r.t. 20 mA	16,000 or 10,000 r.t.	0VDC 0VDC	TM3AI4T TM3AI4TG	0.110 0.100
4 differential temperature inputs (T)	-15...+15 VDC 0...20 mA r.t. 20 mA	16,000 or 10,000 r.t.	0VDC 0VDC	TM3AI4D TM3AI4DG	0.110 0.100
8 self-diagnosing	-15...+15 VDC	12,000 or 10,000 r.t.	0VDC	TM3AI8 TM3AI8G	0.100 0.110

The screenshot shows the Schneider Electric website interface. The main content area displays the product 'TM3AI2H' under the category 'Modicon TM3'. It highlights 'Module TM3 - 2 analog inputs high resolution'. Below the product image, there are navigation tabs: 'Characteristics', 'Documents and Downloads', 'Technical FAQs', 'Additional Information', and 'Dimensions Drawings'. The 'Main' section lists key specifications: 'range of product: Modicon TM3', 'product or component type: Analog input module', and 'range compatibility: Modicon M251'.

Each commercial reference presented in a catalog contains a hyperlink. Click on it to obtain the technical information of the product:

- Characteristics, Dimensions and drawings, Mounting and clearance, Connections and schemas, Performance curves
- Product image, Instruction sheet, User guide, Product certifications, End of life manual

Find your catalog

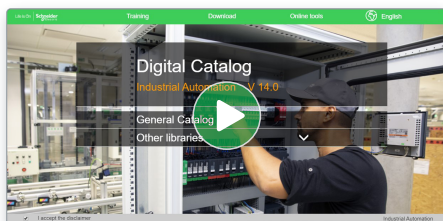

- > With just 3 clicks, you can access the Industrial Automation and Control catalogs, in both English and French
- > Consult digital automation catalogs at [Digi-Cat Online](#)

The screenshot shows a list of product categories on the Schneider Electric website. The categories include: 'Pneumatics, Solenoids, Pilot Lights & Indicators', 'Boxes, Cabinets & Vitrines', 'Signaling Devices', 'HMI (Terminals and Industrial PC)', 'Sensors & RFID System', 'Motor Starters and Load Management', 'Components for Motor Starters', 'Variable Speed Drives & Soft Starters', 'Motor Controls & Robotics', 'Interface, Measurement & Control Relays', and 'PLC, PAC & other Controllers'. Each category has a corresponding product image and a brief description.

- Up-to-date catalogs
- Embedded product selectors, 360° pictures
- Optimized search by commercial references

Select your training



- > Find the right [Training](#) for your needs on our Global website
- > Locate the training center with the selector tool, using this [link](#)

The screenshot shows the 'Training and courses' section of the Schneider Electric website. It features a header with the text 'Training and courses' and a sub-header 'Training by domain of expertise'. Below this, there are three main categories: 'Electrical Installation and Safety', 'Data Center', and 'Industrial Automation'. Each category includes a brief description and a 'Learn More' link.

General content

Modicon® Transformer

Single phase transformers 230 to 400 Vac, 25 to 2500 VA

Modicon ABT7, ABL6

Selection guide for transformers [page 2](#)

■ **Presentation**..... [page 4](#)

■ **Description**..... [page 4](#)

■ **Selection of protection**..... [pages 5 to 9](#)

■ **References**

□ Transformers..... [page 10](#)


□ Separate parts [page 11](#)

□ Replacement parts..... [page 11](#)

■ **Product reference index**..... [page 12](#)

Modicon Transformer

Single phase transformer 230 to 400 Vac,
25 to 2500 VA
Modicon ABT7, ABL6

Input voltage	230 Vac, ± 15 V	230 Vac and 400 Vac, ± 15 V		115 Vac	230 Vac	230 Vac and 400 Vac, ± 15 V	
Output voltage	24 Vac	12 Vac	24 Vac	115 Vac	230 Vac	2 x 24 Vac	2 x 115 Vac
							
							
Connection to world-wide line supplies	United States: 120 V (in phase-to-neutral) United States: 240 V (in phase-to-phase) Europe: 230 V (in phase-to-neutral) Europe: 400 V (in phase-to-phase)	– – Single-phase (N-L1) connection –	– 2-phase (L1-L2) connection Single-phase (N-L1) connection 2-phase (L1-L2) connection	–	–	– 2-phase (L1-L2) connection Single-phase (N-L1) connection 2-phase (L1-L2) connection	–
Applications	SELV transformer (Safety Extra Low Voltage)	SELV transformer (Safety Extra Low Voltage)	–	Isolation transformer	–	SELV transformer (Safety Extra Low Voltage)	Isolation transformer
Secondary winding	Single winding	Single winding	–	–	–	Double winding	–
Signalling	–	–	–	–	–	Presence of input voltage by LED (up to 320 VA)	–
Certifications	- CE marking - EAC	- CE marking - UL (506) - EAC	–	–	–	- CE marking - UL (506) - EAC	–
Conformity to standards (1)	- EN 61558-2-6 - EN 61558-1 - EN 62041	- EN 61558-2-6 - UL 506 - EN 61558-1 - EN 62041	–	- EN 61558-2-4 - EN 61558-1 - EN 62041	–	- EN 61558-2-6 - UL 506 - EN 61558-1 - EN 62041	- EN 61558-2-4 - UL 506 - EN 61558-1 - EN 62041
Transformer type	Transformers 230 VAC, Single winding: ABT7ESM	Transformers 230/400 VAC, Single winding: ABL6			Transformers 230/400 VAC, Double winding: ABT7PDU		
Operating temperature	40 °C	50 °C			60 °C		
Nominal power	25 VA 40 VA 63 VA 100 VA 160 VA 250 VA 320 VA 400 VA 630 VA 1 000 VA 1 600 VA 2 500 VA	ABL6TS02J ABL6TS04J ABL6TS06J ABL6TS10J ABL6TS16J ABL6TS25J	ABL6TS02B ABL6TS04B ABL6TS06B ABL6TS10B ABL6TS16B ABL6TS25B		ABL6TS02G ABL6TS04G ABL6TS06G ABL6TS10G ABL6TS16G ABL6TS25G	ABL6TS02U ABL6TS04U ABL6TS06U ABL6TS10U ABL6TS16U ABL6TS25U	ABT7PDU002G ABT7PDU004G ABT7PDU006G ABT7PDU010G ABT7PDU016G ABT7PDU025G ABT7PDU032G ABT7PDU040G ABT7PDU063G ABT7PDU100G ABT7PDU160G ABT7PDU250G
Pages	4				4		

(1) Consult detail on conformity to standards for each reference in the product data sheet, click on [product reference](#) to open it.
Note: Phaseo Transformers shown in this document are identified as Modicon as they will undergo a future brand change.
All other product documentation will reference Phaseo until the brand change occurs.

Modicon Transformer

Single phase transformers 230 to 400 Vac,
25 to 2500 VA
Modicon ABT7, ABL6

Presentation

Modicon ABT7/ABL6 single-phase transformers are designed to supply control circuits in electrical equipment from a 230 Vac or 400 Vac supply (depending on the model) at 50 or 60 Hz. ± 15 V connectors at the primary ensure adaptation to the actual values of the supply networks to which they are connected.

Transformers 230 V, Single winding: ABT7ESM

The single-winding transformers are primarily designed for repetitive applications and offers the following as standard:

- 230 Vac ± 15 V input voltage
- 24 Vac output voltage
- Panel mounting using 4 screws
- Operating temperature of 40°C (104°F)

Transformers 230/400 V, Single winding: ABL6

The single-winding transformers are designed for standard applications:

- 230 V/400 Vac ± 15 V input voltage
- 12 V, 24 V, 115 V or 230 Vac output voltage
- Panel mounting, using 4 screws (or clip-on \perp rail-mounting option available depending on the model)
- Operating temperature of 50°C (122°F)
- cURus certifications

Transformers 230/400 V, Double winding: ABT7PDU

Transformers with double winding feature an innovative design and offer high-level characteristics (depending on the model) such as:

- 230 V/400 Vac ± 15 V input voltage
- 2 x 115 V or 2 x 24 Vac output voltage
- Clip-on \perp rail mounting (depending on the model) or panel mounting (using 4 screws)
- Series or parallel connection of secondary winding and grounding via internal jumpers
- LED indicator
- Operating temperature of 60°C (140°F)
- cURus certification

Those components are concealed behind a plastic cover making it easier to integrate the Modicon transformers in control cabinets.

Protection

The transformers can be protected against short-circuits by means of fuses or thermal-magnetic circuit-breakers mounted on the secondary.


For operation in compliance with UL standards, short-circuit protection must be achieved using fuses (UL approved) mounted on the primary.

Where the control circuit is isolated from the ground (IT system), a leakage detector will indicate any accidental ground faults.

Description

- 1 Mounted using 4 screws or, depending on the model for ABT7PDU types, by clipping on a 35 mm (1.37 in) \perp rail
- 2 Screw terminals with ± 15 V connectors for connection of the AC input voltage
- 3 Clip-on marker tag or self-adhesive marker tag holder AR1SB3
- 4 LED (green) indicating presence of input voltage (depending on ABT7PDU types)
- 5 Access to the jumpers for selecting the secondary connection (opened using a screwdriver)
- 6 Windows (depending on ABT7PDU types) for viewing the connection via jumpers of the:
 - 0 V to ground (J1 jumper)
 - Series connection, totally freeing up the “customer” secondary wiring capacity (J3 jumper)
 - Parallel connection, totally freeing up the “customer” secondary wiring capacity (J2 and J4 jumpers)
- 7 Screw terminals for connection of the AC output voltage

Note: Phaseo Transformers shown in this document are identified as Modicon as they will undergo a future brand change. All other product documentation will reference Phaseo until the brand change occurs.

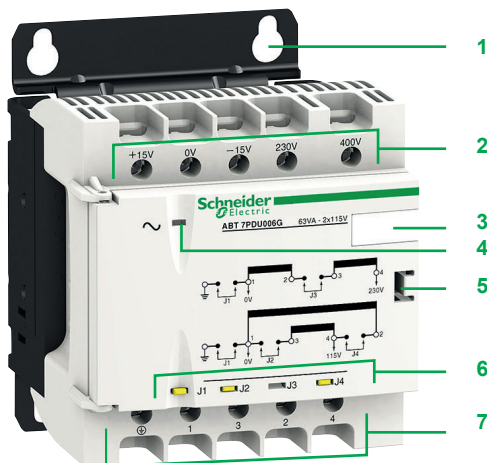

ABT7PDU002...7PDU032

Modicon Transformer

Single phase transformers 230 to 400 Vac,
25 to 2500 VA
Modicon ABT7, ABL6

Selection

Modicon ABT7/ABL6 transformers are characterized by the apparent nominal power they can supply continuously. However, they are also designed to supply, when necessary, significantly higher powers, such as contactor inrush peaks.

Contactor inrush peaks can reach 10 to 20 times the required holding current. This leads to the transformer being oversized in relation to the continuous power it has to supply. The transformer must be sized so that the voltage drop at its terminals, caused by the inrush, remains within the permissible limits for the contactor to close properly.


The two power values that need to be taken into account to determine which transformer rating to use are therefore:

- The continuous power the transformer has to supply
- The maximum inrush power it has to provide

In practice, only the sum of the holding currents and the contactor inrush current need to be considered.

For **ABL6** transformers, the graph below can be used to select the appropriate rating according to these two currents. This gives a maximum voltage drop of 5% at the moment of inrush, compatible with correct operation of the entire installation. However, these transformers have been designed for continuous operation at nominal load and at an ambient temperature of 50°C (122 °F). A reduction in the ambient temperature may uprate the transformer, which, in some cases, allows a lower rating to be used.

The graph below has been drawn up for ambient temperatures of 35...50°C (95...122 °F)

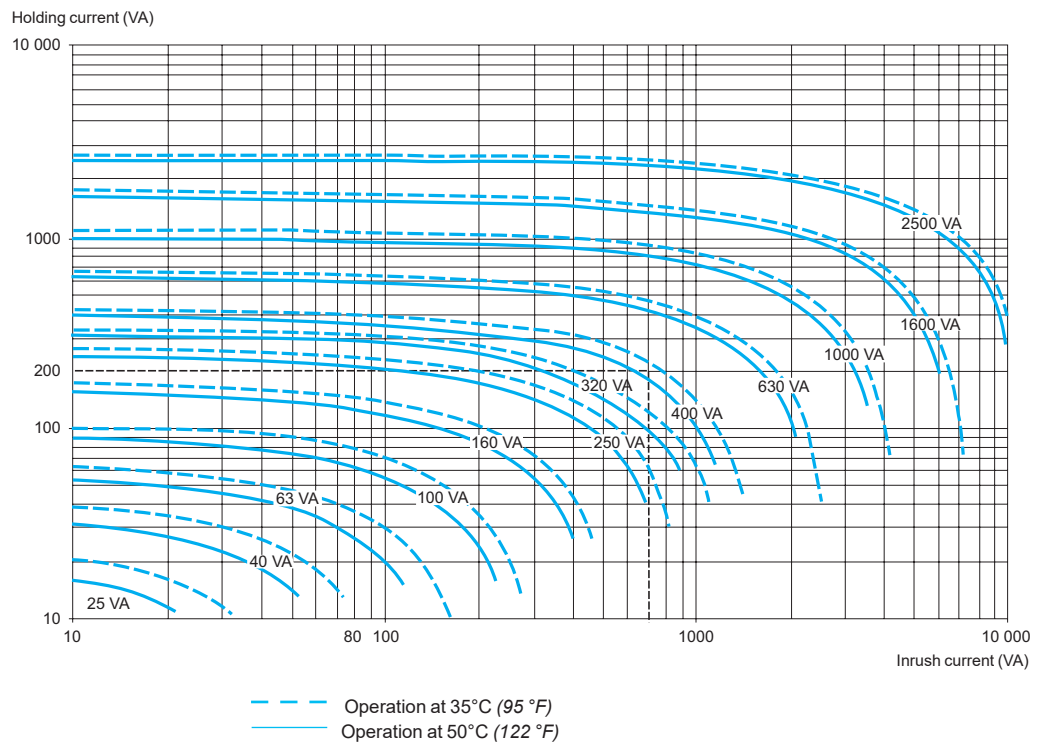

Example: A device with a total holding current of 200 VA and inrush current of the contactor of 700 VA can be supplied by a 630 VA transformer if it is used at an ambient temperature of 50°C (122 °F). A 400 VA transformer is sufficient if the ambient temperature is 35°C (95 °F).

Modicon Transformer

Single phase transformers 230 to 400 Vac,
25 to 2500 VA
Modicon ABT7, ABL6

Recommended protection for the primary

Protection on the primary by fuse or thermal magnetic circuit breaker

Transformer		230 Vac single-phase input voltage			
Reference	Power	MDL fuses UL Listed (1)	aM fuses	TeSys GV2RT	Acti9 IC60 (2)
ABT7ESM004B	40 VA	0.3 A	0.25 A	GV2RT03	0.5 A D curve (3)
ABT7ESM006B	63 VA	0.4 A	0.5 A	GV2RT03	0.5 A D curve (3)
ABT7ESM010B	100 VA	0.5 A	0.5 A	GV2RT04	0.5 A D curve
ABT7ESM016B	160 VA	1 A	1 A	GV2RT05	1 A D curve
ABT7ESM025B	250 VA	1.25 A	2 A	GV2RT06	2 A D curve (3)
ABT7ESM032B	320 VA	1.5 A	2 A	GV2RT06	2 A D curve (3)
ABT7ESM040B	400 VA	2 A	2 A	GV2RT07	3 A D curve (3)

Recommended protection for the secondary

Protection on the secondary by fuses of thermal circuit breaker

Transformer		24 Vac secondary			
Reference	Power	gG fuse (1)	aM fuses	TeSys GB2 (IEC/ CSA-c/US)	Acti9 IC60 (2)
ABT7ESM004B	40 VA	1 A	1 A	GB2CD07	2 A C curve
ABT7ESM006B	63 VA	2 A	2 A	GB2CD08	3 A C curve
ABT7ESM010B	100 VA	4 A	4 A	GB2CD09	4 A C curve
ABT7ESM016B	160 VA	6 A	6 A	GB2CD12	6 A C curve
ABT7ESM025B	250 VA	10 A	10 A	GB2CD16	10 A C curve
ABT7ESM032B	320 VA	12 A	12 A	GB2CD20	16 A C curve
ABT7ESM040B	400 VA	16 A	16 A	GB2CD21	16 A C curve

(1) For operation in compliance with UL

(2) Check on our [website](#) for the exact reference. For installation in North America, please select a UL489 compliant circuit breaker

(3) Protection on the secondary is necessary

Recommended protection for the primary

Protection on the primary by fuse or thermal magnetic circuit breaker

Transformer		230 Vac single-phase					400 Vac single-phase				
Reference	Power	MDL fuses UL listed (1)	aM fuses	TeSys GB2 (IEC/ CSA-c/US)	TeSys GV2RT	Acti9 IC60 (2)	MDL fuses UL Listed (1)	aM fuses	TeSys GB2 (IEC/ CSA-c/US)	TeSys GV2RT	Acti9 IC60 (2)
ABT7PDU002G	25 VA	0.2 A	0.25 A	–	–	–	0.25 A	0.16 A	–	–	–
ABT7PDU004B/G	40 VA	0.3 A	0.25 A	GB2DB05	GV2RT03	0.5 AD curve (3)	0.25 A	0.16 A	–	–	–
ABT7PDU006B/G	63 VA	0.5 A	0.5 A	GB2DB06	GV2RT04	0.5 AD curve (3)	0.25 A	0.25 A	–	–	–
ABT7PDU010B/G	100 VA	0.5 A	0.5 A	GB2DB06	GV2RT04	1 AD curve (3)	0.3 A	0.5 A	GB2DB05	GV2RT03	0.5 AD curve
ABT7PDU016B/G	160 VA	1 A	1 A	GB2DB07	GV2RT05	1 AD curve (3)	0.5 A	0.5 A	GB2DB06	GV2RT04	1 AD curve
ABT7PDU025B/G	250 VA	1.25 A	2 A	GB2DB07	GV2RT06	2 AD curve (3)	0.75 A	1 A	GB2DB06	GV2RT05	1 AD curve
ABT7PDU032B/G	320 VA	1.5 A	2 A	GB2DB07	GV2RT07	2 AD curve	1 A	1 A	GB2DB06	GV2RT05	1 AD curve
ABT7PDU040B/G	400 VA	2 A	2 A	GB2DB09	GV2RT07	3 AD curve (3)	1.25 A	2 A (3)	GB2DB07	GV2RT06	2 AD curve
ABT7PDU063B/G	630 VA	3 A	4 A	GB2DB12 (3)	GV2RT08	6 AD curve (3)	2 A	2 A	GB2DB09 (3)	–	4 AD curve (3)
ABT7PDU100B/G	1000 VA	5 A	6 A	GB2DB16 (3)	GV2RT10	10 AD curve (3)	3 A	4 A (3)	GB2DB12 (3)	–	6 AD curve (3)
ABT7PDU160B/G	1600 VA	8 A	8 A	GB2DB21 (3)	GV2RT14	16 AD curve (3)	4 A	6 A (3)	GB2DB14 (3)	GV2RT10	10 AD curve (3)
ABT7PDU250B/G	2500 VA	–	12 A	–	–	25 AD curve (3)	7 A	8 A (3)	GB2DB21 (3)	GV2RT14	16 AD curve (3)

Recommended protection for the secondary

Protection on the secondary by fuses of thermal circuit breaker

Transformer		24 Vac secondary				48 Vac secondary			
Reference	Power	gG fuse (1)	aM fuses	TeSys GB2 (IEC/ CSA-c/US)	Acti9 IC60 (2)	gG fuse (1)	aM fuses	TeSys GB2 (IEC/ CSA-c/US)	Acti9 IC60 (2)
ABT7PDU004B	40 VA	2 A	2 A	GB2CD07	2 A C curve	1 A	1 A	GB2CD06	1 A C curve
ABT7PDU006B	63 VA	2 A	2 A	GB2CD08	3 A C curve	1 A	1 A	GB2CD06	1 A C curve
ABT7PDU010B	100 VA	4 A	4 A	GB2CD09	4 A C curve	2 A	2 A	GB2CD07	2 A C curve
ABT7PDU016B	160 VA	6 A	6 A	GB2CD12	6 A C curve	2 A	2 A	GB2CD08	3 A C curve
ABT7PDU025B	250 VA	10 A	10 A	GB2CD16	10 A C curve	4 A	4 A	GB2CD10	6 A C curve
ABT7PDU032B	320 VA	12 A	12 A	GB2CD20	16 A C curve	6 A	6 A	GB2CD12	10 A C curve
ABT7PDU040B	400 VA	16 A	16 A	GB2CD21	16 A C curve	8 A	8 A	GB2CD14	10 A C curve
ABT7TDU063B	630 VA	25 A	25 A	–	25 A C curve	12 A	12 A	GB2CD20	16 A C curve
ABT7TDU100B	1000 VA	40 A	40 A	–	40 A C curve	20 A	20 A	GB2CD22	20 A C curve
ABT7TDU160B	1600 VA	63 A	63 A	–	63 A C curve	32 A	32 A	–	32 A C curve
ABT7TDU250B	2500 VA	100 A	100 A	–	–	50 A	50 A	–	50 A C curve

Transformer		115 Vac secondary				230 Vac secondary			
Reference	Power	gG fuse (1)	aM fuses	TeSys GB2 (IEC/ CSA-c/US)	Acti9 IC60 (2)	gG fuse (1)	aM fuses	TeSys GB2 (IEC/ CSA-c/US)	Acti9 IC60 (2)
ABT7PDU002G	25 VA	–	0.25 A	–	–	–	0.16 A	–	–
ABT7PDU004G	40 VA	0.5 A	0.5 A	GB2CD05	–	–	0.25 A	–	–
ABT7PDU006G	63 VA	0.5 A	0.5 A	GB2CD05	0.5 A C curve	–	0.25 A	–	–
ABT7PDU010G	100 VA	1 A	1 A	GB2CD05	1 A C curve	0.5 A	0.5 A	GB2CD06	0.5 A C curve
ABT7PDU016G	160 VA	1 A	1 A	GB2CD06	2 A C curve	0.5 A	0.5 A	GB2CD07	1 A C curve
ABT7PDU025G	250 VA	2 A	2 A	GB2CD06	2 A C curve	1 A	1 A	GB2CD07	1 A C curve
ABT7PDU032G	320 VA	2 A	2 A	GB2CD07	3 A C curve	1 A	1 A	GB2CD08	2 A C curve
ABT7PDU040G	400 VA	4 A	4 A	GB2CD07	4 A C curve	2 A	2 A	GB2CD08	2 A C curve
ABT7TDU063G	630 VA	4 A	4 A	GB2CD09	4 A C curve	2 A	2 A	GB2CD07	2 A C curve
ABT7TDU100G	1000 VA	8 A	8 A	GB2CD14	10 A C curve	4 A	4 A	GB2CD09	4 A C curve
ABT7TDU160G	1600 VA	12 A	12 A	GB2CD20	16 A C curve	6 A	6 A	GB2CD12	6 A C curve
ABT7TDU250G	2500 VA	20 A	20 A	GB2CD22	20 A C curve	10 A	10 A	GB2CD16	10 A C curve

(1) For operation in compliance with UL.

(2) Check on our [website](#) for the exact reference. For installation in North America, please select a UL489 compliant circuit breaker.

(3) Protection on the secondary is necessary.

Recommended protection for the primary

Protection on the primary by fuse or thermal magnetic circuit breaker

Transformer		230 Vac single-phase input voltage					400 Vac single-phase input voltage				
Reference	Power	MDL fuses UL listed (1)	aM fuses	TeSys GB2 (IEC/ CSA-c/ US)	TeSys GV2RT	Acti9 IC60 (2)	MDL fuses UL Listed (1)	aM fuses	TeSys GB2 (IEC/ CSA-c/US)	TeSys GV2RT	Acti9 IC60 (2)
ABL6TS02J	25 VA	0.18 A	0.16 A	–	–	–	0.25 A	0.16 A	–	–	–
ABL6TS04J	40 VA	0.25 A	0.25 A	GB2DB05	GV2RT03	0.5 A D curve (3)	0.25 A	0.16 A	–	–	–
ABL6TS06J	63 VA	0.37 A	0.5 A	GB2DB05	GV2RT03	0.5 A D curve (3)	0.25 A	0.25 A	–	–	–
ABL6TS10J	100 VA	0.5 A	0.5 A	GB2DB06	GV2RT04	1 A D curve (3)	0.3 A	0.5 A	GB2DB05	GV2RT03	0.5 A D curve
ABL6TS16J	160 VA	1 A	1 A	GB2DB07	GV2RT05	2 A D curve (3)	0.5 A	0.5 A	GB2DB06	GV2RT04	1 A D curve
ABL6TS25J	250 VA	1.25 A	2 A	GB2DB07	GV2RT06	2 A D curve (3)	0.75 A	1 A	GB2DB06	GV2RT05	1 A D curve

Recommended protection for the secondary

Protection on the secondary by fuses of thermal circuit breaker

Transformer		12 Vac secondary			
Reference	Power	gG fuse (1)	aM fuses	TeSys GB2 (IEC/ CSA-c/US)	Acti9 IC60 (2)
ABL6TS02J	25 VA	2 A	2 A	GB2CD07	2 A C curve
ABL6TS04J	40 VA	4 A	4 A	GB2CD08	3 A C curve
ABL6TS06J	63 VA	6 A	6 A	GB2CD10	6 A C curve
ABL6TS10J	100 VA	8 A	8 A	GB2CD14	10 A C curve
ABL6TS16J	160 VA	12 A	12 A	GB2CD20	16 A C curve
ABL6TS25J	250 VA	20 A	20 A	GB2CD22	20 A C curve

Recommended protection for the primary

Protection on the primary by fuse or thermal magnetic circuit breaker

Transformer		230 Vac single-phase input voltage					400 Vac single-phase input voltage				
Reference	Power	MDL fuses UL listed (1)	aM fuses	TeSys GB2 (IEC/ CSA-c/ US)	TeSys GV2RT	Acti9 IC60 (2)	MDL fuses UL Listed (1)	aM fuses	TeSys GB2 (IEC/ CSA-c/US)	TeSys GV2RT	Acti9 IC60 (2)
ABL6TS02B	25 VA	0.18 A	0.16 A	–	–	–	0.25 A	0.16 A	–	–	–
ABL6TS04B	40 VA	0.25 A	0.25 A	GB2DB05	GV2RT03	0.5 A D curve (3)	0.25 A	0.16 A	–	–	–
ABL6TS06B	63 VA	0.37 A	0.5 A	GB2DB05	GV2RT03	0.5 A D curve (3)	0.25 A	0.25 A	–	–	–
ABL6TS10B	100 VA	0.5 A	0.5 A	GB2DB05	GV2RT04	1 A D curve (3)	0.3 A	0.5 A	GB2DB05	GV2RT03	0.5 A D curve
ABL6TS16B	160 VA	1 A	1 A	GB2DB06	GV2RT05	2 A D curve (3)	0.5 A	0.5 A	GB2DB06	GV2RT04	1 A D curve
ABL6TS25B	250 VA	1.25 A	2 A	GB2DB07	GV2RT06	2 A D curve (3)	0.75 A	1 A	GB2DB06	GV2RT05	1 A D curve
ABL6TS40B	400 VA	2 A	2 A	GB2DB09	GV2RT07	3 A D curve (3)	1.5 A	1 A	GB2DB07	GV2RT06	2 A D curve
ABL6TS63B	630 VA	3 A	4 A	GB2DB12	GV2RT08	6 A D curve (3)	2.5 A	2 A	GB2DB09	GV2RT07	3 A D curve
ABL6TS100B	1000 VA	5 A	6 A	GB2DB16	GV2RT10	10 A D curve (3)	3.5 A	4 A	GB2DB10	GV2RT08	6 A D curve
ABL6TS160B	1600 VA	8 A	8 A	GB2DB20	GV2RT14	16 A D curve (3)	5 A	4 A	GB2DB14	GV2RT10	10 A D curve
ABL6TS250B	2500 VA	–	12 A	GB2DB22	GV2RT16	20 A D curve (3)	7.5 A	8 A (3)	GB2DB20	GV2RT14	10 A D curve

Recommended protection for the secondary

Protection on the secondary by fuses of thermal circuit breaker

Transformer		24 Vac secondary			
Reference	Power	gG fuse (1)	aM fuses	TeSys GB2 (IEC/ CSA-c/US)	Acti9 IC60 (2)
ABL6TS02B	25 VA	1 A	1 A	GB2CD06	1 A C curve
ABL6TS04B	40 VA	1 A	1 A	GB2CD07	2 A C curve
ABL6TS06B	63 VA	2 A	2 A	GB2CD08	3 A C curve
ABL6TS10B	100 VA	4 A	4 A	GB2CD09	4 A C curve
ABL6TS16B	160 VA	6 A	6 A	GB2CD12	6 A C curve
ABL6TS25B	250 VA	10 A	10 A	GB2CD16	10 A C curve
ABL6TS40B	400 VA	16 A	16 A	GB2CD21	16 A C curve
ABL6TS63B	630 VA	25 A	25 A	–	25 A C curve
ABL6TS100B	1000 VA	40 A	40 A	–	40 A C curve
ABL6TS160B	1600 VA	63 A	63 A	–	63 A C curve
ABL6TS250B	2500 VA	100 A	100 A	–	–

(1) For operation in compliance with UL

(2) Check on our [website](#) for the exact reference. For installation in North America, please select a UL489 compliant circuit breaker

(3) Protection on the secondary is necessary

Recommended protection for the primary

Protection on the primary by fuse or thermal magnetic circuit breaker

Transformer		230 Vac single-phase input voltage				400 Vac single-phase input voltage					
Reference	Power	MDL fuses aM UL listed (1)	aM fuses	TeSys GB2 (IEC/CSA-c/ US)	TeSys GV2RT	Acti9 IC60 (2)	MDL fuses UL Listed (1)	aM fuses	TeSys GB2 (IEC/CSA-c/ US)	TeSys GV2RT	Acti9 IC60 (2)
ABL6TS02G	25 VA	0.18 A	0.16 A	–	–	–	0.25 A	0.16 A	–	–	–
ABL6TS04G	40 VA	0.25 A	0.25 A	GB2DB05	GV2RT03	0.5 AD curve (3)	0.25 A	0.16 A	–	–	–
ABL6TS06G	63 VA	0.37 A	0.5 A	GB2DB06	GV2RT03	0.5 AD curve (3)	0.25 A	0.25 A	–	–	–
ABL6TS10G	100 VA	0.5 A	0.5 A	GB2DB06	GV2RT04	1 AD curve (3)	0.3 A	0.5 A	GB2DB05	GV2RT03	0.5 AD curve
ABL6TS16G	160 VA	1 A	1 A	GB2DB07	GV2RT05	1 AD curve (3)	0.5 A	0.5 A	GB2DB06	GV2RT04	1 AD curve
ABL6TS25G	250 VA	1.25 A	2 A	GB2DB07	GV2RT06	2 AD curve (3)	0.75 A	1 A	GB2DB06	GV2RT05	1 AD curve
ABL6TS40G	400 VA	2 A	2 A	GB2DB09	GV2RT07	4 AD curve (3)	1.5 A	2 A (3)	GB2DB07	GV2RT06	2 AD curve
ABL6TS63G	630 VA	3 A	4 A	GB2DB12	GV2RT08	6 AD curve (3)	2.5 A	4 A (3)	GB2DB08	GV2RT07	3 AD curve
ABL6TS100G	1000 VA	5 A	6 A	GB2DB16	GV2RT10	10 AD curve (3)	3.5 A	4 A	GB2DB10	GV2RT08	6 AD curve
ABL6TS160G	1600 VA	8 A	8 A	GB2DB16	GV2RT14	10 AD curve (3)	5 A	4 A	GB2DB12	GV2RT10	6 AD curve
ABL6TS250G	2500 VA	–	25 A (3)	–	–	–	–	10 A (3)	GB2DB22	GV2RT16 (3)	–

Recommended protection for the secondary

Protection on the secondary by fuses of thermal circuit breaker

Transformer		115 Vac secondary			
Reference	Power	gG fuse (1)	aM fuses	TeSys GB2 (IEC/ CSA-c/US)	Acti9 IC60 (2)
ABL6TS02G	25 VA	–	0.25 A	–	–
ABL6TS04G	40 VA	0.5 A	0.5 A	–	–
ABL6TS06G	63 VA	0.5 A	0.5 A	GB2CD05	0.5 A C curve
ABL6TS10G	100 VA	1 A	1 A	GB2CD06	1 A C curve
ABL6TS16G	160 VA	1 A	1 A	GB2CD07	2 A C curve
ABL6TS25G	250 VA	2 A	2 A	GB2CD07	2 A C curve
ABL6TS40G	400 VA	4 A	4 A	GB2CD09	4 A C curve
ABL6TS63G	630 VA	6 A	6 A	GB2CD12	6 A C curve
ABL6TS100G	1000 VA	8 A	8 A	GB2CD16	10 A C curve
ABL6TS160G	1600 VA	12 A	12 A	GB2CD21	16 A C curve
ABL6TS250G	2500 VA	20 A	20 A	GB2CD22	20 A C curve

Recommended protection for the primary

Protection on the primary by fuse or thermal magnetic circuit breaker

Transformer		230 Vac single-phase input voltage				400 Vac single-phase input voltage					
Reference	Power	MDL fuses aM UL listed (1)	aM fuses	TeSys GB2 (IEC/CSA-c/ US)	TeSys GV2RT	Acti9 IC60 (2)	MDL fuses UL Listed (1)	aM fuses	TeSys GB2 (IEC/CSA-c/ US)	TeSys GV2RT	Acti9 IC60 (2)
ABL6TS02U	25 VA	0.18 A	0.16 A	–	–	–	0.25 A	0.16 A	–	–	–
ABL6TS04U	40 VA	0.25 A	0.25 A	GB2DB05	GV2RT03	0.5 AD curve (3)	0.25 A	0.16 A	–	–	–
ABL6TS06U	63 VA	0.37 A	0.5 A	GB2DB05	GV2RT03	0.5 AD curve (3)	0.25 A	0.25 A	–	–	–
ABL6TS10U	100 VA	0.5 A	0.5 A	GB2DB05	GV2RT04	1 AD curve (3)	0.3 A	0.5 A	GB2DB05	GV2RT03	0.5 AD curve
ABL6TS16U	160 VA	1 A	1 A	GB2DB06	GV2RT05	2 AD curve (3)	0.5 A	0.5 A	GB2DB06	GV2RT04	1 AD curve
ABL6TS25U	250 VA	1.25 A	2 A	GB2DB07	GV2RT06	2 AD curve (3)	0.75 A	1 A	GB2DB06	GV2RT05	1 AD curve
ABL6TS40U	400 VA	2 A	2 A	GB2DB09	GV2RT07	3 AD curve (3)	1.5 A	2 A (3)	GB2DB07	GV2RT06	2 AD curve
ABL6TS63U	630 VA	3 A	4 A	GB2DB14	GV2RT10 (3)	10 AD curve (3)	2.5 A	4 A (3)	GB2DB10	GV2RT08 (3)	4 AD curve
ABL6TS100U	1000 VA	5 A	6 A	GB2DB20	GV2RT14 (3)	10 AD curve (3)	5 A (3)	4 A	GB2DB12	GV2RT10 (3)	6 AD curve
ABL6TS160U	1600 VA	8 A	8 A	GB2DB20	GV2RT14	16 AD curve (3)	5 A (3)	4 A	GB2DB14	GV2RT10	6 AD curve
ABL6TS250U	2500 VA	–	16 A (3)	–	–	–	–	10 A (3)	GB2DB22	GV2RT16 (3)	16 AD curve

Recommended protection for the secondary

Protection on the secondary by fuses of thermal circuit breaker

Transformer		230 Vac secondary			
Reference	Power	gG fuse (1)	aM fuses	TeSys GB2 (IEC/ CSA-c/US)	Acti9 IC60 (2)
ABL6TS02U	25 VA	–	0.16 A	–	–
ABL6TS04U	40 VA	–	0.16 A	–	–
ABL6TS06U	63 VA	–	0.25 A	–	–
ABL6TS10U	100 VA	0.5 A	0.5 A	GB2CD05	0.5 A C curve
ABL6TS16U	160 VA	0.5 A	0.5 A	GB2CD06	1 A C curve
ABL6TS25U	250 VA	1 A	1 A	GB2CD06	1 A C curve
ABL6TS40U	400 VA	2 A	2 A	GB2CD07	2 A C curve
ABL6TS63U	630 VA	2 A	2 A	GB2CD08	3 A C curve
ABL6TS100U	1000 VA	4 A	4 A	GB2CD09	4 A C curve
ABL6TS160U	1600 VA	6 A	6 A	GB2CD14	6 A C curve
ABL6TS250U	2500 VA	10 A	10 A	GB2CD16	10 A C curve


(1) For operation in compliance with UL

(2) Check on our [website](#) for the exact reference. For installation in North America, please select a UL489 compliant circuit breaker.


(3) Protection on the secondary is necessary

Modicon Transformer

Single phase transformers 230 to 400 Vac,
25 to 2500 VA
Modicon ABT7, ABL6



ABT7ESM000B



ABL6TS000

Transformers with single phase (N-L1) or phase-to-phase (L1-L2) connection

Input voltage	Secondary		Nominal power	Reference	Weight kg/lb
	Type	Voltage			
Transformers 230 VAC, Single winding					
230 Vac single phase, (N-L1) or phase to phase (L1-L2) connection ± 15 V	Single winding	24 V	40 VA	ABT7ESM004B	1.020/2.249
			63 VA	ABT7ESM006B	1.140/2.513
			100 VA	ABT7ESM010B	1.900/4.189
			160 VA	ABT7ESM016B	2.720/5.997
			250 VA	ABT7ESM025B	3.540/7.804
			320 VA	ABT7ESM032B	4.080/8.995
			400 VA	ABT7ESM040B	5.100/11.244

Transformers 230/400 VAC, Single winding

230 Vac single phase, (N-L1), 400 Vac phase to phase (L1-L2) ± 15 V	Single winding	12 V	25 VA	ABL6TS02J	0.700/1.543
			40 VA	ABL6TS04J	1.200/2.646
			63 VA	ABL6TS06J	1.600/3.527
			100 VA	ABL6TS10J	2.100/4.630
			160 VA	ABL6TS16J	3.200/7.055
			250 VA	ABL6TS25J	4.400/9.700
		24 V	25 VA	ABL6TS02B	0.700/1.543
			40 VA	ABL6TS04B	1.200/2.646
			63 VA	ABL6TS06B	1.600/3.527
			100 VA	ABL6TS10B	2.100/4.630
			160 VA	ABL6TS16B	3.200/7.055
			250 VA	ABL6TS25B	4.400/9.700
			400 VA	ABL6TS40B	6.500/14.330
			630 VA	ABL6TS63B	9.800/21.605
			1000 VA	ABL6TS100B	14.300/31.526
			1600 VA	ABL6TS160B	19.400/42.770
			2500 VA	ABL6TS250B	27.400/60.407
		115 V	25 VA	ABL6TS02G	0.700/1.543
			40 VA	ABL6TS04G	1.200/2.646
			63 VA	ABL6TS06G	1.600/3.527
			100 VA	ABL6TS10G	2.100/4.630
			160 VA	ABL6TS16G	3.200/7.055
			250 VA	ABL6TS25G	4.400/9.700
			400 VA	ABL6TS40G	6.500/14.330
			630 VA	ABL6TS63G	9.800/21.605
			1000 VA	ABL6TS100G	14.300/31.526
			1600 VA	ABL6TS160G	19.400/42.770
			2500 VA	ABL6TS250G	27.400/60.407
		230 V	25 VA	ABL6TS02U	0.700/1.543
			40 VA	ABL6TS04U	1.200/2.646
			63 VA	ABL6TS06U	1.600/3.527
			100 VA	ABL6TS10U	2.100/4.630
			160 VA	ABL6TS16U	3.200/7.055
			250 VA	ABL6TS25U	4.400/9.700
			400 VA	ABL6TS40U	6.500/14.330
			630 VA	ABL6TS63U	9.800/21.605
			1000 VA	ABL6TS100U	14.300/31.526
			1600 VA	ABL6TS160U	19.400/42.770
			2500 VA	ABL6TS250U	27.400/60.407

Modicon Transformer


Single phase transformers 230 to 400 Vac,

25 to 2500 VA


Modicon ABT7, ABL6




ABT7PDU002...032



ABT7PDU040...250



ABL6AM0



AR1SB3

Transformers with single phase (N-L1) or phase-to-phase (L1-L2) connection

Input voltage	Secondary		Nominal power	Reference	Weight kg/lb
	Type	Voltage			
Transformers 230/400 V, Double winding					
With cover, connected by internal jumpers with LED indicators					
230 Vac single phase, (N-L1), 400 Vac phase to phase (L1-L2) ± 15 V	Double winding	2 x 24 V	40 VA	ABT7PDU004B	1.400/3.086
			63 VA	ABT7PDU006B	1.940/4.277
			100 VA	ABT7PDU010B	2.860/6.305
			160 VA	ABT7PDU016B	4.400/9.700
			250 VA	ABT7PDU025B	5.600/12.346
			320 VA	ABT7PDU032B	7.100/15.653
		2 x 115 V	25 VA	ABT7PDU002G	1.100/2.425
			40 VA	ABT7PDU004G	1.400/3.086
			63 VA	ABT7PDU006G	1.940/4.277
			100 VA	ABT7PDU010G	2.860/6.305
			160 VA	ABT7PDU016G	4.400/9.700
			250 VA	ABT7PDU025G	5.600/12.346
			320 VA	ABT7PDU032G	7.100/15.653
Without cover, connected by external jumpers					
230 Vac single phase, (N-L1), 400 Vac phase to phase (L1-L2) ± 15 V	Double winding	2 x 24 V	400 VA	ABT7PDU040B	7.400/16.314
			630 VA	ABT7PDU063B	7.900/17.418
			1000 VA	ABT7PDU100B	14.000/30.865
			1600 VA	ABT7PDU160B	20.000/44.092
			2500 VA	ABT7PDU250B	28.000/61.729
		2 x 115 V	400 VA	ABT7PDU040G	7.400/16.314
			630 VA	ABT7PDU063G	7.900/17.418
			1000 VA	ABT7PDU100G	14.000/30.865
			1600 VA	ABT7PDU160G	20.000/44.092
			2500 VA	ABT7PDU250G	28.000/61.729

Separate parts for ABT7 and ABL6

Designation	Use on transformers	Order in multiples of	Unit reference	Weight kg/lb
Plates for mounting on rail	ABL6TS02J, ABL6TS02B, ABL6TS02G, ABL6TS02U	5	ABL6AM00	0.045/0.099
	ABT7ESM004B, ABT7ESM006B, ABL6TS04J, ABL6TS04B, ABL6TS04G, ABL6TS04U	5	ABL6AM01	0.050/0.110
	ABL6TS06J, ABL6TS06B, ABL6TS06G, ABL6TS06U	5	ABL6AM02	0.055/0.121
	ABT7ESM010B, ABL6TS10J, ABL6TS10B, ABL6TS10G, ABL6TS10U	5	ABL6AM03	0.065/0.143
	ABT7ESM016B	5	ABL6AM04	0.085/0.187
Self-adhesive marker tag holder 20 x 10 mm (0.78 x 0.39 in)	–	50	AR1SB3	0.001/0.002

Replacement parts for ABT7 and ABL6

Designation	Use on	Reference	Weight kg/lb
Pack of 10 jumpers	ABT7PDU double-winding transformer	ABT7JMP01	0.010/0.022

A			
ABL6AM00	11	ABT7PDU032B	11
ABL6AM01	11	ABT7PDU032G	11
ABL6AM02	11	ABT7PDU040B	11
ABL6AM03	11	ABT7PDU040G	11
ABL6AM04	11	ABT7PDU063B	11
ABL6TS02B	10	ABT7PDU063G	11
ABL6TS02G	10	ABT7PDU100B	11
ABL6TS02J	10	ABT7PDU100G	11
ABL6TS02U	10	ABT7PDU160B	11
ABL6TS04B	10	ABT7PDU160G	11
ABL6TS04G	10	ABT7PDU250B	11
ABL6TS04J	10	ABT7PDU250G	11
ABL6TS04U	10	ABT7TDU063B	7
ABL6TS06B	10	ABT7TDU063G	7
ABL6TS06G	10	ABT7TDU100B	7
ABL6TS06J	10	ABT7TDU100G	7
ABL6TS06U	10	ABT7TDU160B	7
ABL6TS100B	10	ABT7TDU160G	7
ABL6TS100G	10	ABT7TDU250B	7
ABL6TS100U	10	ABT7TDU250G	7
ABL6TS10B	10	AR1SB3	11
ABL6TS10G	10		
ABL6TS10J	10		
ABL6TS10U	10		
ABL6TS160B	10		
ABL6TS160G	10		
ABL6TS160U	10		
ABL6TS16B	10		
ABL6TS16G	10		
ABL6TS16J	10		
ABL6TS16U	10		
ABL6TS250B	10		
ABL6TS250G	10		
ABL6TS250U	10		
ABL6TS25B	10		
ABL6TS25G	10		
ABL6TS25J	10		
ABL6TS25U	10		
ABL6TS40B	10		
ABL6TS40G	10		
ABL6TS40U	10		
ABL6TS63B	10		
ABL6TS63G	10		
ABL6TS63U	10		
ABT7ESM004B	10		
ABT7ESM006B	10		
ABT7ESM010B	10		
ABT7ESM016B	10		
ABT7ESM025B	10		
ABT7ESM032B	10		
ABT7ESM040B	10		
ABT7JMP01	11		
ABT7PDU002G	11		
ABT7PDU004B	11		
ABT7PDU004G	11		
ABT7PDU006B	11		
ABT7PDU006G	11		
ABT7PDU010B	11		
ABT7PDU010G	11		
ABT7PDU016B	11		
ABT7PDU016G	11		
ABT7PDU025B	11		
ABT7PDU025G	11		

Life Is On



Learn more about our products at
www.schneider-electric.com

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier - CS 30323
F-92500 Rueil-Malmaison Cedex
France

DIA3ED2170403EN
October 2020 - V3.0