



Safety Information

Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

A qualified person is one who has skills and knowledge related to the construction, installation, and operation of electrical equipment and has received safety training to recognize and avoid the hazards involved.

Esmi Impresia White Wall Mounted Sounder

Esmi Impresia White Wall Mounted Sounder (FFS06741014) is an addressable wall mounted sounder with a built-in isolator module designed for installing in addressable fire alarm systems with Esmi ELC loop controller supporting Schneider Electric communication protocol. The sounder is compatible with fire bases Esmi Impresia Standard Base (FFS06741018), Esmi Impresia Standard Base High Profile (FFS06741028) and Esmi Impresia Red IP65 Deep Base (FFS06741013) for wall mounting. EN 54-3 for indoor and outdoor use.

The address setting is done by the panel, QR code or handheld addressing device.
The address range is 1-250.

For more technical information visit www.se.com.

Installation Instructions

Note: Collect the QR code stickers from the devices if QR codes are used for addressing of the devices.

- 1. Follow the applicable local and national installation codes and regulations. Choose the proper place for installation of the device.
- 2. Turn power off the loop circuit before installing the mounted sounder.
- 3. Set the module address using programmer or directly from addressable fire panel.
- 4. Mount the fire base on the wall of the protected premises using fixings according the mounting surface.
- 5. Connect the base to the fire panel using the wiring diagram.
- 6. Insert the device into the base and rotate clockwise until it drops into place - the short mark on the base fits with that on the sounder body. Continue to rotate the sounder until its mark coincides with the long mark on the base - a click is heard.
- 7. Program the device parameters.
- 8. Test the sounder for proper operation.

Technical Specifications

Operating Voltage Range..... 16 - 32VDC (Nom. 27VDC)
Nominal consumption (stand-by) <500µA@27VDC
Maximal consumption (main tone type 27):
- low volume level <5mA
- high volume level <16.5mA
Maximal consumption (other tone types):
- low volume level <4mA
- high volume level <10mA
Consumption with activated isolator..... <15mA
Power volume (main tone type 27):
- low volume ~ 80dB (A) ± 6dB @ 1m
- high volume ~ 92dB (A) ± 5dB @ 1m
Power volume (other tone types):
- low volume 75-85dB ± 3dB @ 1m
- high volume 80-95dB ± 3dB @ 1m
Number of tone types.....32
Wire Gauge for terminals 2.5mm²
Relative humidity resistance (93 ± 3)% @ 40°C
Color.....white
MaterialABS
Supported communication protocolEsmi ELC

Installation


Indoor use*


Outdoor use**

 **IP43C (EN54-3)***
IP65 (EN60529)**


 **-10°C ÷ +50°C**

 **~183g**

* When used with Esmi Impresia Standard Base
** When used with Esmi Impresia IP65 Red Deep Base

Essential Characteristics According to EN 54	Performance
Performance under fire conditions	Pass
Operational reliability	Pass
Durability:	
Temperature resistance	Pass
Humidity resistance	Pass
Shock and vibration resistance	Pass
Corrosion resistance	Pass
Resistance to ingress	Pass
Electrical stability	Pass

Dimensions



CE₁₂₉₃
DoP: DP20030
Made in Bulgaria
EN 54-3:2001
EN 54-3:2001/A1:2002
EN 54-3:2001/A2:2006
EN 54-17:2005
EN 54-17:2005/AC:2007
Sounder Type A

Schneider Electric Buildings AB
Mobilvägen 8
22362 Lund
Sweden



Isolator Module Technical Specifications

Maximum line voltage (V_{max})	32V
Nominal line voltage (V_{nom})	28V
Minimum line voltage (V_{min})	16V
Maximum voltage at which the device isolates ($V_{so\ max}$)*	7.5V
Minimum voltage at which the device isolates ($V_{so\ min}$)*	5.9V
Maximum voltage at which the device reconnects ($V_{sc\ max}$)**	6.7V
Minimum voltage at which the device reconnects ($V_{sc\ min}$)**	5V
Maximum rated continuous current with the switch closed ($I_c\ max$)	0.7A
Maximum rated switching current (e.g. under short circuit) ($I_s\ max$)	1.8A
Maximum leakage current with the switch open (isolated state) ($I_l\ max$)	16mA
Maximum series impedance with the switch closed ($Z_c\ max$)	0.12 Ω @28VDC and 0.15 Ω @16VDC


* Note: Switches from closed to open

** Note: Switches from open to closed

A-weighted sound level diagram

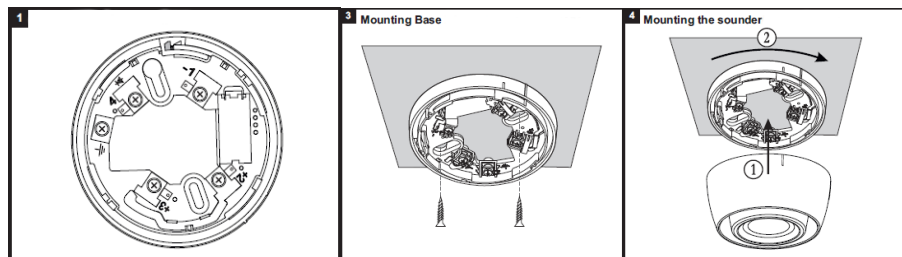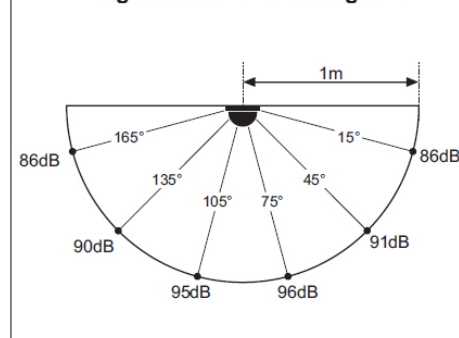

Wiring Diagram

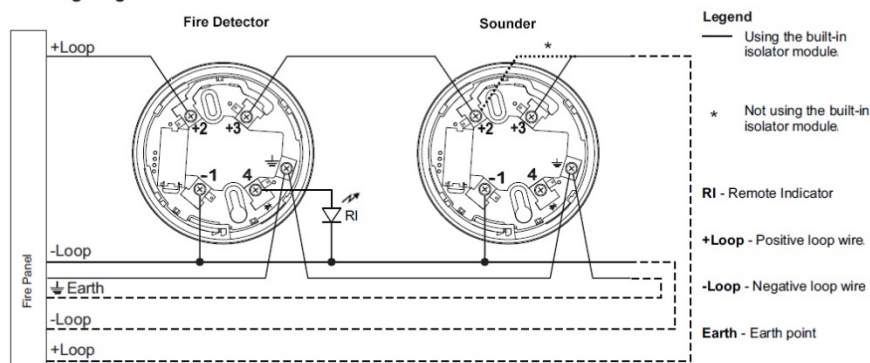

Tone	Tone Type	Tone Description/Application	High Level [dB @ 1m]	Low Level [dB @ 1m]
1	—	970Hz	87	84
2	□	800Hz/970Hz @ 2Hz	89	84
3	▧	800Hz - 970Hz @ 1Hz	91	87
4	—	970Hz 1s OFF/1s ON	88	85
5	□	970Hz, 0.5s/ 630Hz, 0.5s	91	88
6	□	554Hz, 0.1s/ 440Hz, 0.4s (AFNOR NF S 32 001)	88	84
7	▧	500 - 1200Hz, 3.5s/ 0.5s OFF (NEN 2575:2000)	95	89
8	—	420Hz 0.625s ON/0.625s OFF (Australia AS1670 Alert tone)	91	88
9	▧	500 - 1200Hz, 0.5s/ 0.5s OFF x 3/1.5s OFF (AS1670 Evacuation)	92	88
10	□	550Hz/440Hz @ 0.5Hz	90	88
11	—	970Hz, 0.5s ON/0.5s OFF x 3/ 1.5s OFF (ISO 8201)	89	84
12	—	2850Hz, 0.5s ON/0.5s OFF x 3/1.5s OFF (ISO 8201)	82	75
13	▧	1200Hz - 500Hz @ 1Hz (DIN 33 404)	91	89
14	—	400Hz	91	88
15	□	550Hz, 0.7s/1000Hz, 0.33s	91	87
16	▧	1500Hz - 2700Hz @ 3Hz	92	85
17	—	750Hz	91	88
18	—	2400Hz	84	77
19	—	660Hz	88	84
20	—	660Hz 1.8s ON/1.8s OFF	88	86
21	—	660Hz 0.15s ON/0.15s OFF	89	86
22	□	510Hz, 0.25s/ 610Hz, 0.25s	94	91
23	▧	800/1000Hz 0.5s each (1Hz)	90	87
24	▧	250Hz - 1200Hz @ 12Hz	89	86
25	▧	500Hz - 1200Hz @ 0.33Hz	90	88
26	▧	2400Hz - 2900Hz @ 9Hz	88	82
27	▧	2400Hz - 2900Hz @ 3Hz 2500Hz (main sound frequency)	92	83
28	▧	800Hz - 970Hz @ 100Hz	91	88
29	▧	800Hz - 970Hz @ 9Hz	92	89
30	▧	800Hz - 970Hz @ 3Hz	91	88
31	—	800Hz, 0.25s ON/1s OFF	89	87
32	▧	600Hz - 1100Hz, 2.6s/0.4s OFF	93	89