

RP-C-EXT-BL-SMI-2-LV-PD

SpaceLogic™ RP Controller Expansion Modules

EcoStruxure™ Building



SMI blind module with power distribution for low voltage

Introduction

SpaceLogic* RP-C-EXT-BL-SMI-2-LV-PD SMI blind module connects to the SpaceLogic RP room controllers and provides I/O expansion for control of DC low-voltage motors (drives) with SMI LoVo (Standard Motor Interface for low-voltage applications).

The SMI blind module is an SMI certified and registered actuator (controller) that complies to SMI version 3.0. SMI 3.0 offers simplified maintenance, new functions, improved robustness, and high compatibility. The module can be used with products of SMI version 2.0 because the interface is backward compatible.

The SMI low-voltage blind module enables control and power supply (24 VDC) of motorized venetian blinds, roller blinds, pleated blinds, and other shade products (typically for interior use).

The SMI blind module is part of the RP controller expansion modules for connected room solution and can be combined with other modules from this product range.

* Formerly known as SmartX.

RP-C-EXT-BL-SMI-2-LV-PD

Features

The SMI low-voltage blind module has the following features:

- Power and communications through the room bus
- One SMI channel, which is split into two outputs, for SMI LoVo control of 24 VDC powered blinds (opening, closing, positioning)
- Four digital inputs for connection of blind switches and window contacts. The digital inputs are SELV (Safety Extra-Low Voltage).
- Measurement of energy consumption per module
- Wieland connectors for quick and easy installation
- Engage mobile application for room comfort settings
- Status LED for the device
- One status LED for each blind output
- Rotary switch for address configuration

SMI LoVo blind control

The SMI interface has the following features:

- Up to 16 blind motors or drives can be controlled electrically in parallel (provided the load limits are not exceeded)
- High-precision intermediate positioning
- Motor feedback with diagnostic information

Room bus

The RP controller room bus allows RP controller expansion modules to be connected to the controller for people counting, motion detection, luminosity and sound pressure level

measurements, Bluetooth Low Energy based applications, and control of electric lights and window blinds.

The RP-C Pro controller room bus supports up to nine connected RP controller expansion modules with the following restrictions:

- Maximum of two DALI light modules
- Maximum of two SMI blind modules
- Maximum of seven Multi-sensor or Insight-Sensor devices

The RP-C Advanced controller room bus supports up to six connected RP controller expansion modules with the following restrictions:

- Maximum of two DALI light modules
- Maximum of two SMI blind modules
- Maximum of four Multi-sensor or Insight-Sensor devices

Maximum total length of the room bus is 72 m (236 ft).

Engage mobile application

The Engage mobile application enables control of room temperature, fan speed, lights, and blinds/shades directly from a smartphone. A user can manage these settings when the application is connected to the RP-C controller.

The Engage mobile application is free and available for download from Google Play and Apple App Store.

For more information, see the Engage Specification Sheet.


Part Numbers

Product	Part number
RP-C-EXT-BL-SMI-2-LV-PD	SXWRESMI2LVDP10001
DIN-RAIL-CLIP, DIN-rail end clip package of 25 pieces	SXWDINEND10001

Specifications

RP-C-EXT-BL-SMI-2-LV-PD	
Electrical	
Nominal voltage	230 VAC
Operating voltage range	+/-10 %
Frequency	50/60 Hz
Power consumption	75 VA

RP-C-EXT-BL-SMI-2-LV-PD

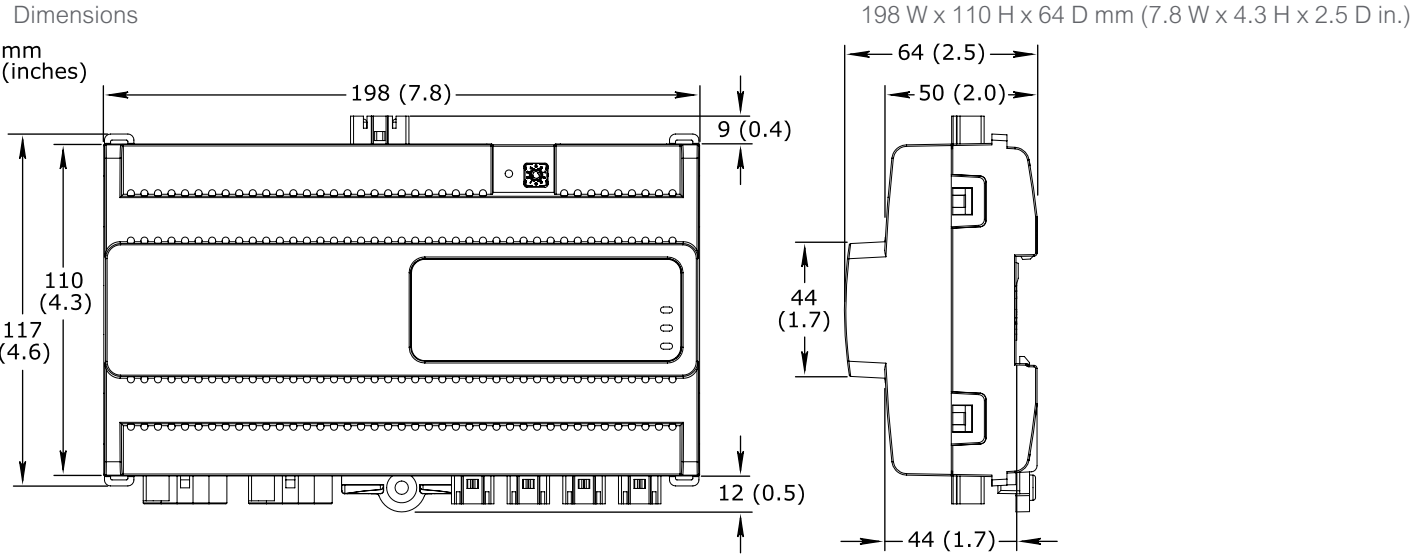Room bus power consumption	0.3 W (24 VDC)
Protection	Maximum 16 A external fuse (circuit breaker) is needed
Overvoltage category	III
Onboard 24 VDC power supply	
RP-C-EXT-BL-SMI-2-LV-PD has an onboard 24 VDC power supply that is used to power the blind outputs.	
Nominal voltage	24 VDC
Maximum supply current	1.3 A
Protection	Short-circuit protection
Environment	
Ambient temperature, operating	0 to 40 °C (32 to 104 °F)
Ambient temperature, storage	-20 to +70 °C (-4 to +158 °F)
Humidity	20 to 90 % RH non-condensing
Pollution degree	2
Material	
Plastic flame rating	UL94 V-0
Ingress protection rating	IP 20
Mechanical	
Dimensions	198 W x 110 H x 64 D mm (7.8 W x 4.3 H x 2.5 D in.)
	
Weight	0.439 kg (0.968 lb)
Installation	DIN rail or flat surface ^a
a) For information on installation orientation restrictions, see the SpaceLogic Hardware Reference Guide.	
Connectors	Power input: 1 x 3-pin Wieland GST15i3 connector Blind outputs: 2 x 5-pin Wieland GST15i5 connector Digital inputs: 4 x 2-pin Wieland GST15i2 connector

RP-C-EXT-BL-SMI-2-LV-PD


Software compatibility		
EcoStruxure Building Operation software		version 3.2 and later
Agency compliances		
Emission	RCM; BS/EN 61000-6-3; BS/EN 50491-5-2; FCC Part 15, Sub-part B, Class B	
Immunity	BS/EN 61000-6-2; BS/EN 50491-5-3	
Safety standards	BS/EN 60730-1; BS/EN 60730-2-11; BS/EN 50491-3	
Communication ports		
Room bus	RS-485 Dual RJ45 ports for daisy-chain configurations Use a Cat 5 (or higher) cable Maximum total length of the room bus: 72 m (236 ft)	
Room bus protection	Transient voltage suppressors on communication and power signals	
Hardware		
CPU type	ARM Cortex-M4 single-core	
Frequency	80 MHz	
SRAM (embedded)	320 KB	
Flash memory (embedded)	512 KB	
NOR flash memory	16 MB	
Status indicator	LED (green and red) that shows the status of the device	
Blind status indicator	One status LED (green) for each output	
Address switch	Rotary switch 0 to 9	
Set button	Push-button switch	
Energy metering		
Energy consumption measurement		
The energy consumption is measured in Wh, shared by the two outputs.		
Accuracy class (according to IEC 61557-12)	Active energy measurement: Class 1	
Typical measurement accuracy at room temperature	0.5 to 2 W: 5% 2 to 30 W: 1%	
Blind outputs		
SMI LoVo motor control outputs for 24 VDC powered blinds motors.		
Outputs	2, Blind 1 to Blind 2	
Output terminals	I+, I-, 0 V, and 24 V	
SMI version	3.0	
Number of SMI channels	1	
Maximum total number of blind motors (drives)	16	

RP-C-EXT-BL-SMI-2-LV-PD

Power distribution	24 VDC Maximum 1 A load per output Maximum 1.3 A total load for the 2 outputs Maximum 2 A starting current (<100 ms) per output
Digital inputs	
Inputs	4, DI1 to DI4
Range	Dry contact, 0 to 5.0 VDC, 2.2 mA, SELV (Safety Extra-Low Voltage)

Connections

Follow proper installation wiring diagrams and instructions. For more information on wiring, see the SpaceLogic Hardware Reference Guide.

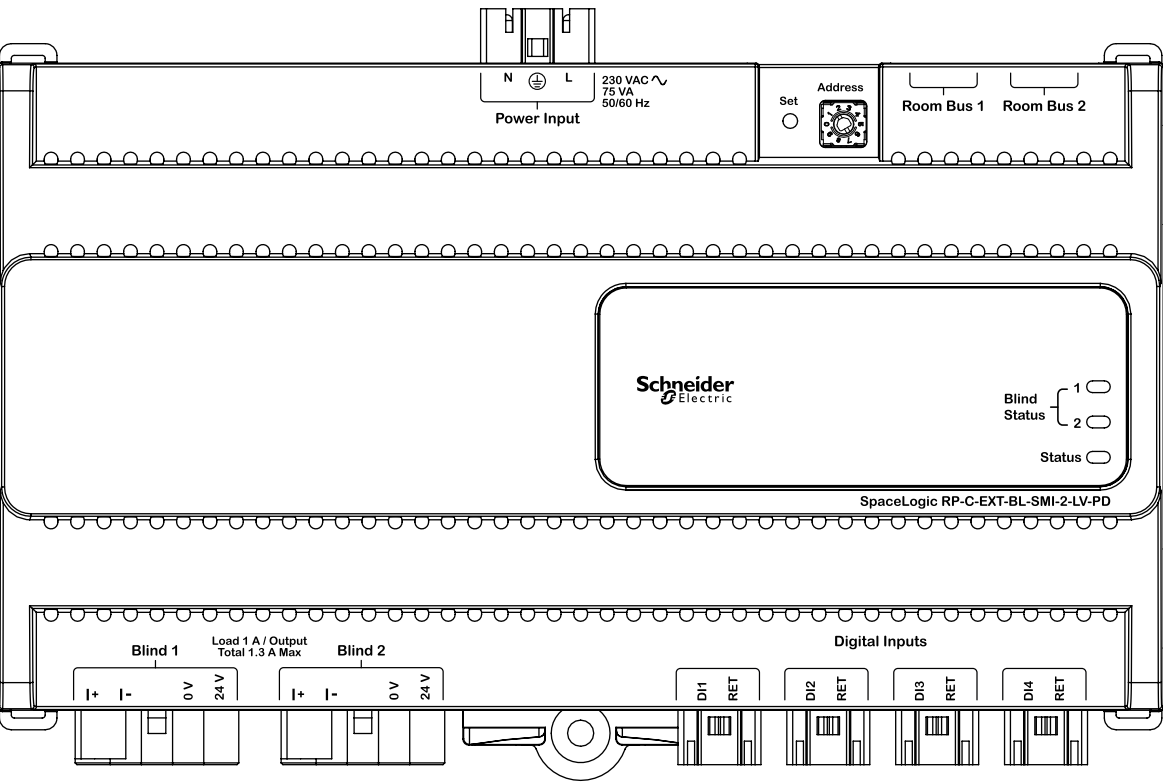

RP-C-EXT-BL-SMI-2-LV-PD

RP-C-EXT-BL-SMI-2-LV-PD

Required External Connectors

Use	Part number	Reference	Connector type	Suitable for cable diametersmm (inches)	Marking	Color of coding /housing	Minimum order quantity
Power supply input	SXWRPCCON WWPOW	91.931.4053.1	Female	5.6–11 (0.22–0.43)	L, PE, N	Black /Black	100
Blind outputs	SXWRPCCON WBLLV	91.952.4353.0	Male	8.5–12.5 (0.34–0.49)	5, 4, 3, 2, 1 5: I+ 4: I- 3: Not used 2: 0 V 1: 24 V	Light blue /White	50
Digital inputs	SXWRPCCON WDI	91.921.2353.0	Female	3.4–5.5 (0.14–0.21)	1, 2 1: DI1..4 2: RET	Light blue /White	100

The external connectors need to be ordered separately. The connectors can be ordered in quantities of 50 or 100 from Schneider Electric using the above part numbers. The connectors can also be ordered directly from Wieland using the

above reference numbers. For more information, see the Wieland Electric web site.

Compatibility with the type and characteristics of the blind motors should be verified at an early stage in your project. In case of uncertainty, additional testing may be required.

RP-C-EXT-BL-SMI-2-LV-PD

Regulatory Notices



Federal Communications Commission

FCC Rules and Regulations CFR 47, Part 15, Class B

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference. (2) This device must accept any interference received, including interference that may cause undesired operation.

Industry Canada

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.



Regulatory Compliance Mark (RCM) - Australian Communications and Media Authority (ACMA)

This equipment complies with the requirements of the relevant ACMA standards made under the Radiocommunications Act 1992 and the Telecommunications Act 1997. These standards are referenced in notices made under section 182 of the Radiocommunications Act and 407 of the Telecommunications Act.



LoVo

Certified and Registered Product.

This product has a certified and registered SMI interface.

All certified and registered products are listed on the SMI Standard Motor Interface e.V web site www.Standard-Motor-Interface.com.



CE - Compliance to European Union (EU)

2014/30/EU Electromagnetic Compatibility Directive

2014/35/EU Low Voltage Directive

2011/65/EU Restriction of Hazardous Substances (RoHS) Directive

2015/863/EU amending Annex II to Directive 2011/65/EU

This equipment complies with the rules, of the Official Journal of the European Union, for governing the Self Declaration of the CE Marking for the European Union as specified in the above directive(s).



WEEE - Directive of the European Union (EU)

This equipment and its packaging carry the waste of electrical and electronic equipment (WEEE) label, in compliance with European Union (EU) Directive 2012/19/EU, governing the disposal and recycling of electrical and electronic equipment in the European community.



UK Conformity Assessed

S.I. 2016/1091 - Electromagnetic Compatibility Regulations 2016

S.I. 2016/1101 - Electrical Equipment (Safety) Regulations 2016

S.I. 2012/3032 - Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012

S.I. 2013/3113 - Waste Electrical and Electronic Equipment Regulations 2013

This equipment complies with the rules, of the UK regulations, for governing the UKCA Marking for the United Kingdom specified in the above directive(s).

www.se.com/buildings

Life Is On

Schneider
Electric